


SV-1600 VALVE MODELS

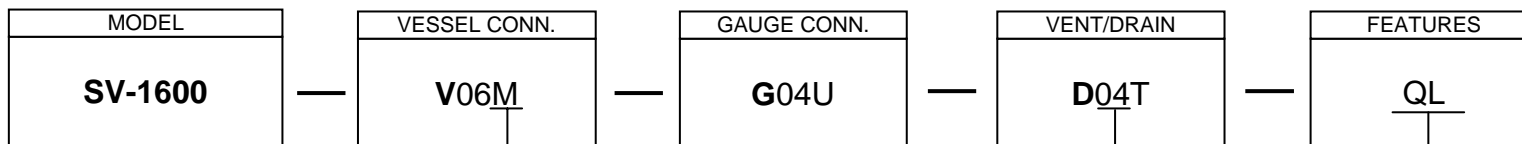

CONNECTION TYPE:

M = MALE NPT
 T = FEMALE NPT
 S = SOCKET WELD (FEMALE)
 I = IPS EXTENSION (MALE SOCKET WELD)
 F = FLANGE (NOTE CLASS & TYPE)
 N = STUFFING BOX
 U = GASKET UNION (UNIFLEX)

SIZE:

03 = 3/8"
 04 = 1/2"
 06 = 3/4"
 08 = 1"
 10 = 10-1/4"
 12 = 10-1/2"
 16 = 2"
 20 = 2-1/2"
 24 = 3"

OPTIONAL FEATURES:

L = LEVERS (*MUST SPECIFY QL*)
 Q = QUICK CLOSING
 P = LOCK OPEN
 W = CHAIN WHEEL
 BC = BALL CHECKS

STANDARD DESCRIPTION:

- OUTSIDE SCREW & YOKE
- BOLTED BONNET
- BACK SEATING STEM
- GRAPHITE PACKING
- STANDARD RATING: 1,600 WSP PSI (*FLANGE RATING CAN DE-RATE*)
- RIGID, NON-UNION VESSEL CONN
- VESSEL CONN: (*INSERT SIZE & TYPE*)
- GAGE CONN: (*INSERT SIZE & TYPE*)
- VENT/DRAIN: (*INSERT SIZE & TYPE*)

13960 S. Wayside
 Houston, TX 77048
 Toll Free: 866.240.9906
 Tel: 281.240.0440
 Fax: 281.240.2440

Visit our website at:
www.QTSLevel.com

Contact us by email:
sales@QTSLevel.com