


SV-1600A VALVE MODELS

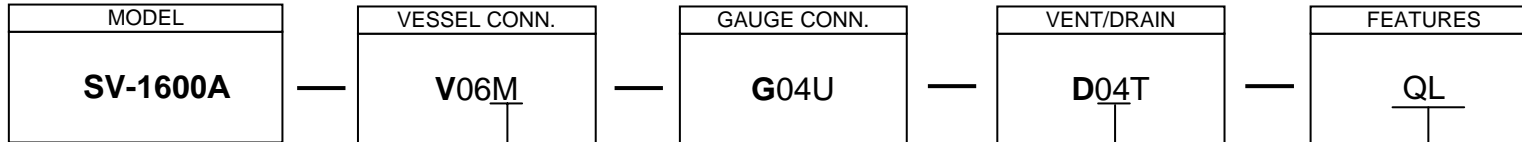

CONNECTION TYPE:

M = MALE NPT
T = FEMALE NPT
S = SOCKET WELD (FEMALE)
I = IPS EXTENSION (MALE SOCKET WELD)
F = FLANGE (NOTE CLASS & TYPE)
N = STUFFING BOX
U = GASKET UNION (UNIFLEX)

SIZE:

03 = 3/8"
04 = 1/2"
06 = 3/4"
08 = 1"
10 = 1-1/4"
12 = 1-1/2"
16 = 2"
20 = 2-1/2"
24 = 3"

OPTIONAL FEATURES:

L = LEVERS (*MUST SPECIFY QL*)
Q = QUICK CLOSING
P = LOCK OPEN
W = CHAIN WHEEL
BC = BALL CHECKS

STANDARD DESCRIPTION:

- OUTSIDE SCREW & YOKE
- BOLTED BONNET
- BACK SEATING STEM
- GRAPHITE PACKING
- STANDARD RATING: 1,600 WSP PSI (*FLANGE RATING CAN DE-RATE*)
- RIGID, NON-UNION VESSEL CONN
- VESSEL CONN: (*INSERT SIZE & TYPE*)
- GAGE CONN: (*INSERT SIZE & TYPE*)
- VENT/DRAIN: (*INSERT SIZE & TYPE*)

13960 S. Wayside
Houston, TX 77048
Toll Free: 866.240.9906
Tel: 281.240.0440
Fax: 281.240.2440

Visit our website at:
www.QTSLevel.com

Contact us by email:
sales@QTSLevel.com