
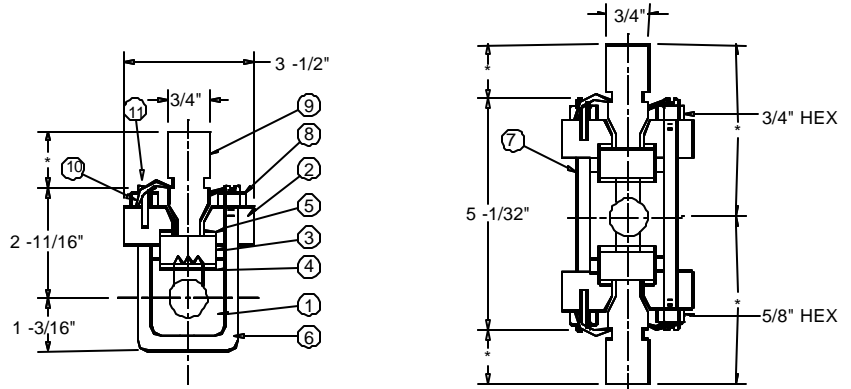


MID PRESSURE GAGE				
Glass Size	REFLEX MAX. PSIG @ TEMP.*		TRANSPARENT MAX. PSIG @ TEMP.**	
	100°	600°	100°	600°
1	3000	2220	2500	1850
2	2910	2150	2315	1720
3	2820	2080	2130	1575
4	2725	2040	1940	1435
5	2630	1950	1750	1295
6	2535	1875	1565	1160
7	2440	1805	1375	1015
8	2345	1740	1190	880
9	2250	1670	1000	740

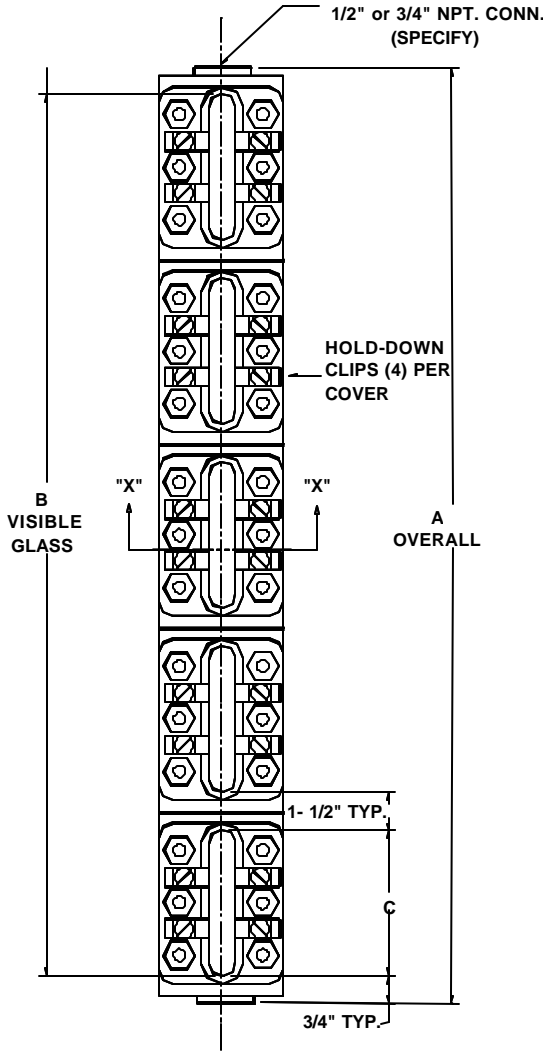

* Depends on Extension Length

ITEM NO.	NAME	CARBON STEEL	STAINLESS STEEL WETTED
1	CHAMBER	CARBON STEEL	316L SS
2	COVER	CARBON STEEL	CARBON STEEL
3	GLASS	TEMPERED	TEMPERED
12	SHIELD	AS REQUIRED	AS REQUIRED
4	GASKET	NON-ASBESTOS	NON-ASBESTOS
5	CUSHION	NON-ASBESTOS	NON-ASBESTOS
6	U-BOLT	ASTM A193 B7	ASTM 193 B7
7	BOLT	ASTM A193 B7	ASTM 193 B7
8	NUT	ASTM A194 2H	ASTM A194 2H
9	EXTENSION	PLASTIC	PLASTIC
10	CLIP	303 S.S	303 S.S.
11	SCREW	303 S.S	303 S.S.

SIZE NO.	NUMBER OF SECTIONS DIMENSION "A" IN INCHES					NUMBER OF SECTIONS DIMENSION "B" IN INCHES					DIM "C" IN INCHES
	1	2	3	4	5	1	2	3	4	5	
1	5 1/4					3 3/4					3 3/4
2	6 1/4					4 3/4					4 3/4
3	7 1/4	14 1/2				5 3/4	13				5 3/4
4	8 1/4	16 1/2				6 3/4	15				6 3/4
5	9 3/8	18 3/4				7 7/8	17 1/4				7 7/8
6	10 5/8	21 1/4	31 7/8			9 1/8	19 3/4	30 3/8			9 1/8
7	11 3/4	23 1/2	35 1/4	47	58 3/4	10 1/4	22	33 3/4	45 1/2	57 1/4	10 1/4
8	13 3/8	26 3/4	40 1/8	53 1/2	66 7/8	11 7/8	25 1/4	38 5/8	52	65 3/8	11 7/8
9	14 1/8	28 1/4	42 3/8	56 1/2	70 5/8	12 5/8	26 3/4	40 7/8	55	69 1/8	12 5/8

Customer _____

Cust. P. O. #: _____

Factory #: _____

Rep P.O. #: _____

Assembled _____ "Centers"

Tag #'s: _____

FROST PREVENTION EXTENSIONS 120-34
SERIES FP
MID PRESSURE
1/2" OR 3/4" NPT CONN.



P.O. Box 2127 • Stafford, Texas 77497-2127
 (281) 240-0440 • Fax: (281) 240-2440

Scale: _____ **Date:** _____

Drawing #: _____

Revision #: _____

Drawn By: **DMC**

Ck'd By: _____

Certified By: _____

Model #: _____